


P360

**Pneumatic plastic strapping tool
for heavy strapping applications**

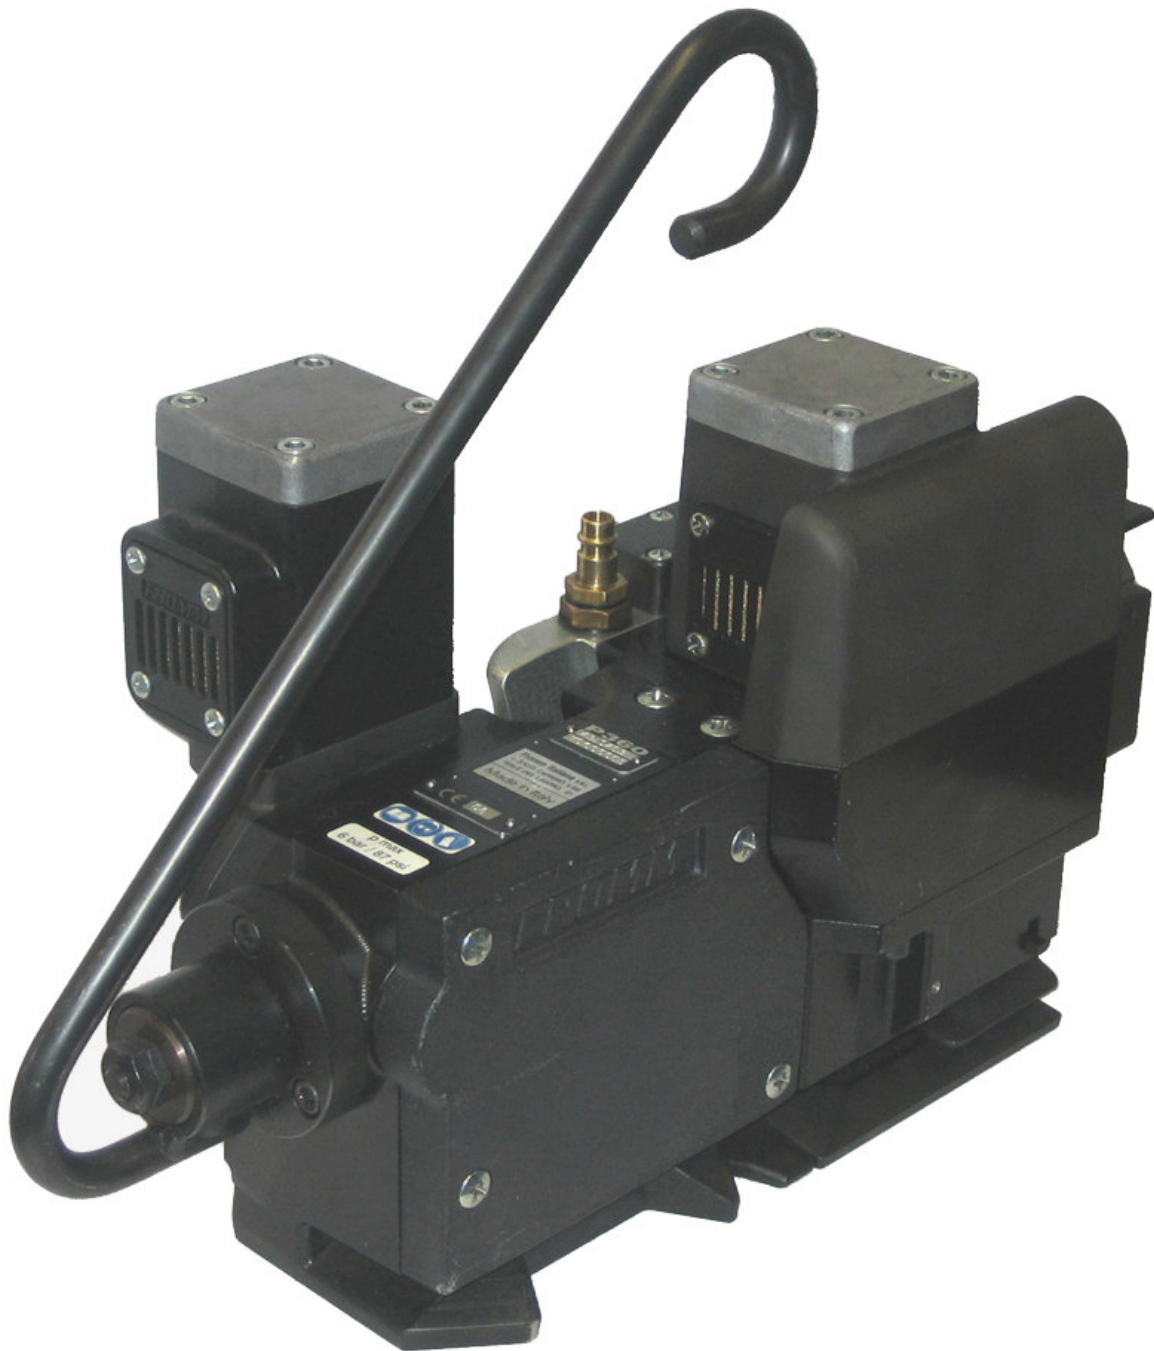


**The latest tool suitable for strapping
dimensions up to 32 mm / 1 1/4".**

P360

Pneumatic sealless plastic strapping tools for heavy strapping applications

Based on the successful model P350 the new tool will also be suitable for heavy strap thicknesses up to 1.35 mm / .053" (19 mm: up to 1.53 mm / 3/4": up to .060") and allows impressive high tension forces up to 7000 N / 1570 lbs. With this tool converting heavy steel strapping to PET creates major cost savings for the users.

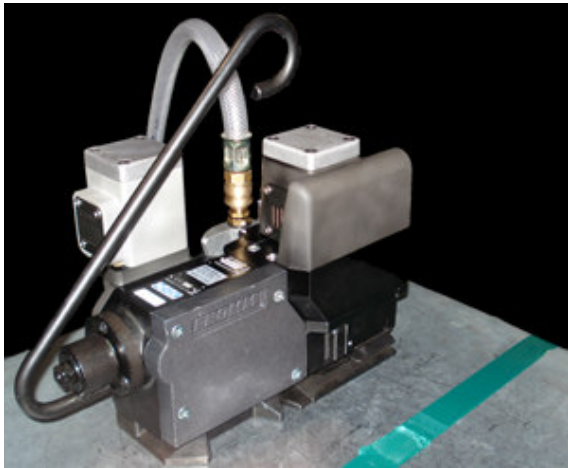

Advantages:

- High tension force up to 7000 N / 1570 lbs
- Ideal for heavy duty applications with strapping dimensions from 19 to 32 mm / 3/4 - 1 1/4"
- Suitable for continuous operation
- Pneumatically powered
- Very reliable and service friendly
- The strap tension can be adjusted individually
- The sealing time can be set individually
- High seal strength

Characteristics

Strapping qualities:

Strapping dimensions: widths
thicknesses

Weight:

Dimension:

Average seal strength:

Strap tension:

Tensioning speed:

Max. air pressure:

P360

PET

19.0 - 32.0 mm / 3/4 - 1 1/4"

0.40 - 1.53 mm / .016 - .060"

18.5 kg / 40.8 lbs (including suspension bracket)

L490 x W166 x H338 mm / 19.3" x 6.5" x 13.3"

up to 75 % (dependent on strap quality)

2200 - 4000 N / 495 - 900 lbs (adjustable) or

3800 - 7000 N / 855 - 1570 lbs (adjustable)

270 mm/s / 10.6 inch/s or 150 mm/s / 5.9 inch/s

6.0 bar / 87 psi

